

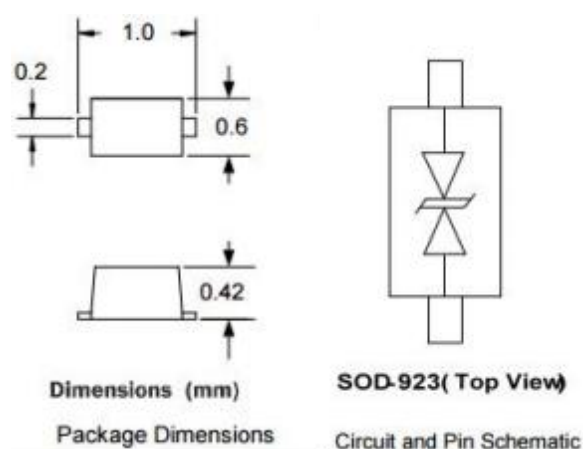
Description

The ESD9B5V0 is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium. Because of its small size, it is suited for use in cellular phones, MP3 players, digital cameras and many other portable applications where board space is at a premium.

Features

- Small Body Outline Dimensions: 1.0 mm x 0.60 mm
- Low Body Height: 0.43 mm Max
- Low Clamping Voltage
- Response Time is Typically < 1 ns
- Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 30\text{kV}$
 - Contact discharge: $\pm 20\text{kV}$
- IEC61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 5.5A (8/20 μs)
- RoHS Compliant

Dimensions & Symbol (Unit: mm Max)




Mechanical Characteristics

- Package: SOD-923 (1.0×0.6×0.4mm)
- Lead Finish: NiPdAu
- Case Material: "Green" Molding Compound.
- UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 3 per J-STD-020
- Terminal Connections: See Diagram Below
- Marking Information: See Below

Applications

- Cellular Handsets and Accessories
- Display Ports
- MDDI Ports
- USB Ports
- Digital Video Interface (DVI)
- PCI Express and Serial SATA Ports

Marking information



Detail smarking code reference customer approval list

Ordering Information







Part Number	Packaging	Reel Size
ESD9B5V0	10000/Tape & Reel	7 inch

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	Ppk	68	W
Peak Pulse Current (8/20 μs)	Ipp	5.5	A
ESD per IEC 61000-4-2 (Air)	VESD	± 20	kV
ESD per IEC 61000-4-2 (Contact)		± 20	
Operating Temperature Range	TJ	-55 to +150	$^{\circ}\text{C}$
Storage Temperature Range	Tstg	-55 to +150	$^{\circ}\text{C}$


Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	VRWM			5	V	
Breakdown Voltage	VBR	5.7		9	V	IT = 1mA
Reverse Leakage Current	IR			0.1	μA	VRWM = 3.3V
Clamping Voltage	VC			12	V	IPP = 1A (8 x 20 μs pulse)
Clamping Voltage	VC			17	V	IPP = 5.5A (8 x 20 μs pulse)
Junction Capacitance	CJ	8	8.9	15	pF	VR = 0V, f = 1MHz

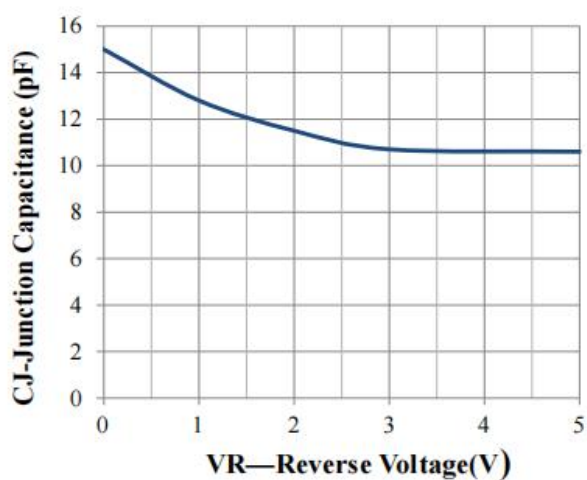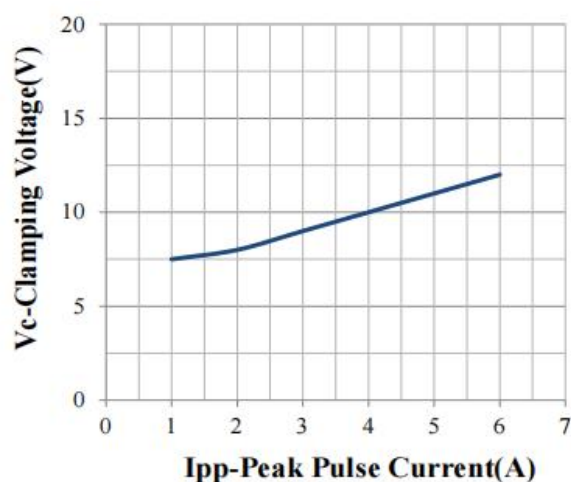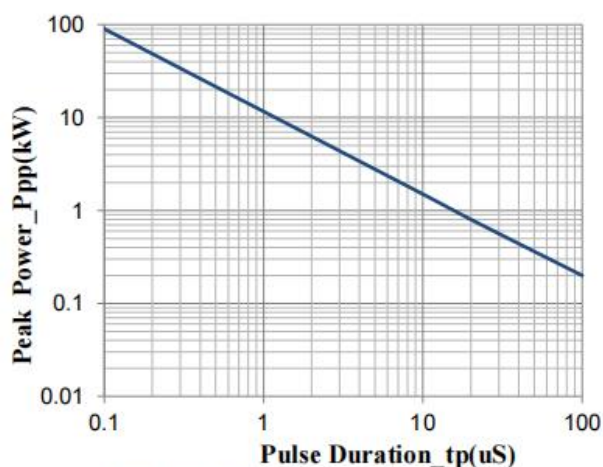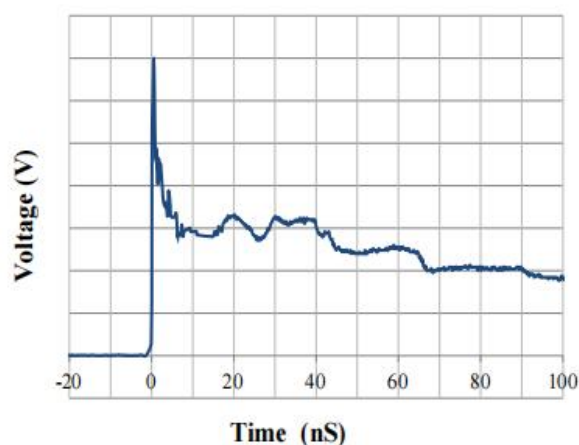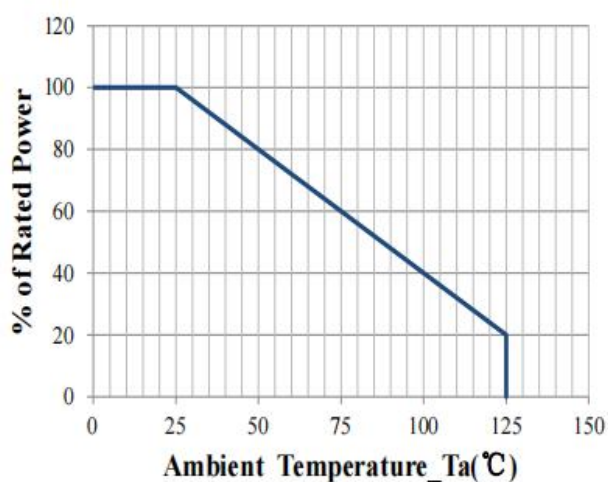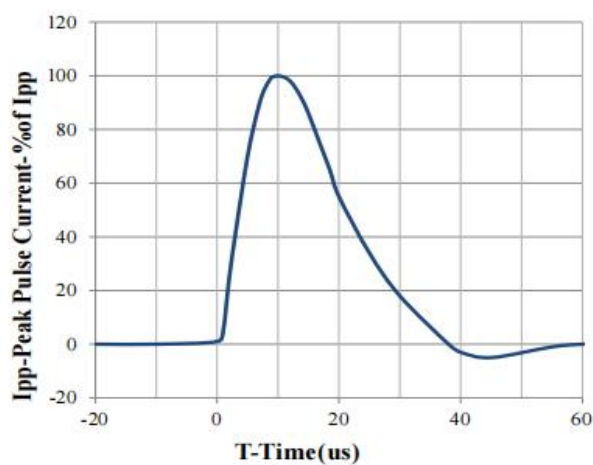
Typical Performance Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise Specified)

Junction Capacitance vs. Reverse Voltage

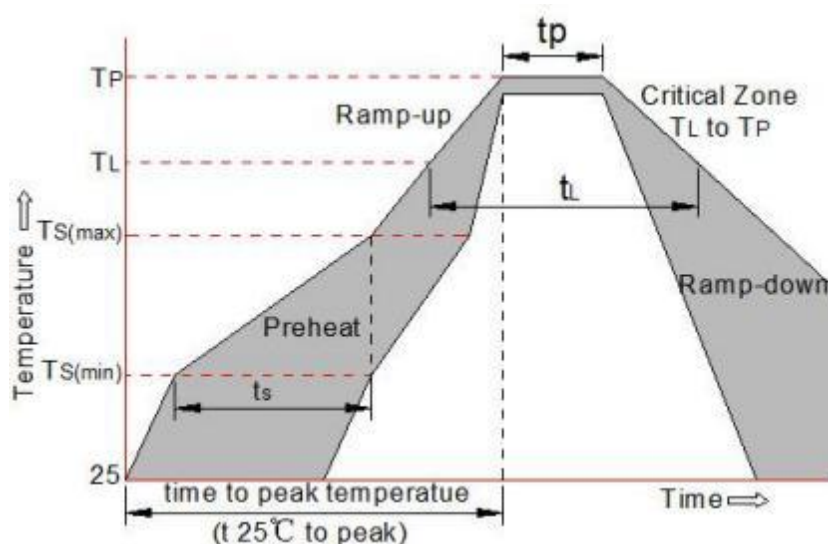Clamping Voltage vs. Peak Pulse Current

Peak Pulse Power vs. Pulse Time

IEC61000-4-2 Pulse Waveform

Power Derating Curve

8 X 20us Pulse Waveform

Soldering parameters


Reflow Condition		Pb-Free assembly (see FIG.2)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L) (Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_p)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_p)		8 min. Max
Do not exceed		+260°C




Package mechanical data



TOP VIEW




SIDE VIEW



BOTTOM VIEW

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.39	0.42	0.45	0.016	0.017	0.018
b	0.15	0.20	0.25	0.006	0.008	0.010
c	0.07	0.12	0.17	0.003	0.005	0.007
D	0.75	0.80	0.85	0.030	0.032	0.034
E	0.55	0.60	0.65	0.022	0.024	0.026
F	0.95	1.00	1.05	0.038	0.040	0.042
L	0.19 REF			0.007 REF		
L2	0.05	0.10	0.15	0.002	0.004	0.006

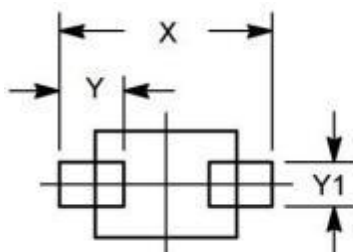Suggested Land Pattern



SYM	DIMENSIONS	
	MILLIMETERS	INCHES
X	1.20	0.048
Y	0.36	0.014
Y1	0.25	0.010

Contact information

JAWIN Electronics Limited

Room 1115, building A, Yulong Science and Technology Building, East Ring Road,
Longhua district, Shenzhen City

TEL: 86755-28150286

FAX: 86755-28150286

JAWIN Electronics Limited reserves the right to make changes to the product specification and data in this document without notice. JAWIN makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JAWIN assume any liability arising from the application or use of any products or circuits, and specifically dis-claims any and all liability, including without limitation special, consequential or incidental damages.